


Hybrid™ E8 & E9

All-in-One Ultraviolet Filtration with Reversible Bracket



*Copper pipes (pictured) not included.

Parts Included

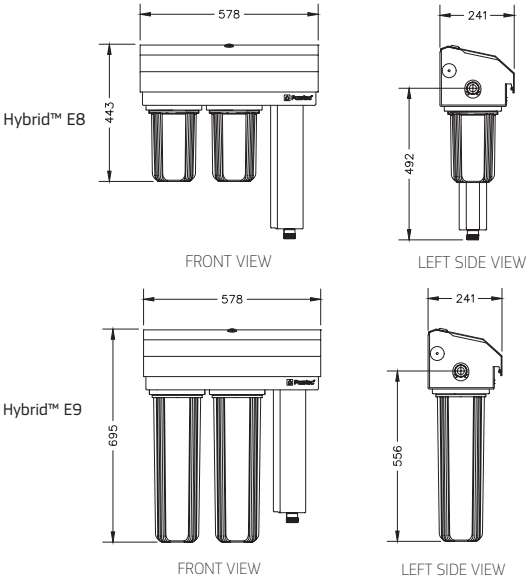

Note: All dimensions are in mm.

Specifications

Ordering Code	Pressure** (kPa)	Max. Flow (Lpm)	Connection	Micron Rating*
HYBRID-E8-LF	300-875	75	1" BSP(Male) (25 mm)	1
HYBRID-E9-LF	300-875	130	1" BSP(Male) (25 mm)	1

Flow rate @40mJ/cm²	Flow rate @30mJ/cm²	Flow rate @16mJ/cm²
54 Lpm	70 Lpm	130 Lpm

Min/Max Temperature: 0-52°C. Protect from freezing.

FILTRATION TECHNOLOGY

Ordering Code	Description	Flow (Lpm)	Micron Rating* (Nominal)	Cartridge Size
HYBRID-E8 CARTRIDGES				
PL20MP1	Sediment	0-75	20	10" MaxiPlus
PX01MP1	Polyspun Sediment	0-90	1	10" MaxiPlus
HYBRID-E9 CARTRIDGES				
PL20MP2	Sediment	0-130	20	20" MaxiPlus
PX01MP2	Polyspun Sediment	0-180	1	20" MaxiPlus

HYBRIDCARE SERIES MAINTENANCE KIT

Ordering Code	Components
HR-EI8	Includes: 10" MaxiPlus™ Pleated Sediment Cartridge [PL20MP1], Polyspun Sediment Cartridge [PX01MP1], 46W UV Lamp [RL7], and Replacement Quartz Sleeve [RQS6].
HR-EI9	Includes: 20" MaxiPlus™ Pleated Sediment Cartridge [PL20MP2], Polyspun Sediment Cartridge [PX01MP2], 46W UV Lamp [RL7], and Replacement Quartz Sleeve [RQS6].

Warranty: Use only genuine Puretec replacement cartridges. 3 year warranty is 1 year parts and labour, 2 years parts only. Excludes cartridges.



Warning: Please visit www.puretecgroup.com/instructions to observe essential manufacturer's instructions before use. **Note:** No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change. This document and all its contents are copyright protected. All rights are reserved, particularly alteration, translation and reproduction using electronic systems. This spec sheet has been designed to help make product selection easy. However due to the complex nature of water chemistry, we strongly encourage confirming any product selection with one of our team. We may need to perform a water analysis test to confirm contaminants in water. **Caution:** Do not use with microbiologically unsafe water or water of unknown quality without adequate disinfection before or after the system. **Warranty:** ^Warranties in this document cover parts for the period stated and include cover for parts and labour for the first year where applicable, subject to approval. Excludes consumables. *Micron Rating is nominal. Our Water Filtration Specialists can provide you with advice to suit your needs. **Where line pressure exceeds 520kPa, an approved pressure limiting device must be installed to comply with Australian & New Zealand Plumbing Standards (Ref. AS 3500.1:2021, Clause 3.3.4). Maximum flow depends on cartridges, vessel, pressure, impurities etc.